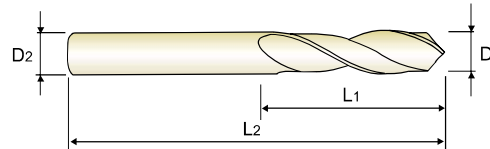



CARBIDE DRILLS
STUB
 **VOLLHARTMETALL-SPIRALBOHRER**
 **Forets carbure, série extra-courte**
 **PUNTE IN METALLO DURO**
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

► **Application** : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

► **Verwendung** : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.


D1=D2

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5405010	1.0	6	26
D5405011	1.1	7	28
D5405012	1.2	8	30
D5405013	1.3	8	30
D5405014	1.4	9	32
D5405015	1.5	9	32
D5405016	1.6	10	34
D5405017	1.7	10	34
D5405018	1.8	11	36
D5405019	1.9	11	36
D5405020	2.0	12	38
D5405021	2.1	12	38
D5405022	2.2	13	40
D5405023	2.3	13	40
D5405024	2.4	14	43
D5405025	2.5	14	43
D5405026	2.6	14	43
D5405027	2.7	16	46
D5405028	2.8	16	46
D5405029	2.9	16	46
D5405030	3.0	16	46
D5405031	3.1	18	49
D5405032	3.2	18	49
D5405033	3.3	18	49

EDP No.	Drill Diameter	Flute Length	Overall Length
	D1	L1	L2
D5405034	3.4	20	52
D5405035	3.5	20	52
D5405036	3.6	20	52
D5405037	3.7	20	52
D5405038	3.8	22	55
D5405039	3.9	22	55
D5405040	4.0	22	55
D5405041	4.1	22	55
D5405042	4.2	22	55
D5405043	4.3	24	58
D5405044	4.4	24	58
D5405045	4.5	24	58
D5405046	4.6	24	58
D5405047	4.7	24	58
D5405048	4.8	26	62
D5405049	4.9	26	62
D5405050	5.0	26	62
D5405051	5.1	26	62
D5405052	5.2	26	62
D5405053	5.3	26	62
D5405054	5.4	28	66
D5405055	5.5	28	66
D5405056	5.6	28	66
D5405057	5.7	28	66

► TiN(D6405), TiCN(DG405) and TiAlN(DH405) are available on your request.

► **NEXT PAGE**

◎ : Excellent ○ : Good

ISO	P										M					K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20				
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25	21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230				
Recommended	◎	○				○						○			○									
ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc											15	30	25	38	34			55	60	42	55			
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
Recommended	◎	◎	◎	◎												○								

REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA



CARBIDE DRILLS

STUB

VOLLHARTMETALL-SPIRALBOHRER

Forets carbure, série extra-courte

PUNTE IN METALLO DURO


EXTRA KURZ

EXTRA-COURTE


EXTRA CORTA

►Application : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

►Verwendung : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.



under 3.0mm 3.0mm & over

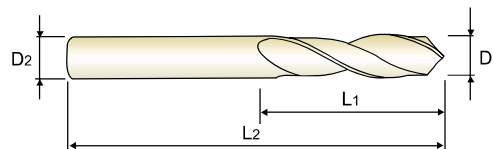DIN
6539

CARBIDE

30°

h6

h7

118°

P.167

D₁=D₂

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D ₁	L ₁	L ₂
D5405058	5.8	28	66
D5405059	5.9	28	66
D5405060	6.0	28	66
D5405061	6.1	31	70
D5405062	6.2	31	70
D5405063	6.3	31	70
D5405064	6.4	31	70
D5405065	6.5	31	70
D5405066	6.6	31	70
D5405067	6.7	31	70
D5405068	6.8	34	74
D5405069	6.9	34	74
D5405070	7.0	34	74
D5405071	7.1	34	74
D5405072	7.2	34	74
D5405073	7.3	34	74
D5405074	7.4	34	74
D5405075	7.5	34	74
D5405076	7.6	37	79
D5405077	7.7	37	79
D5405078	7.8	37	79
D5405079	7.9	37	79
D5405080	8.0	37	79
D5405081	8.1	37	79
D5405082	8.2	37	79

EDP No.	Drill Diameter	Flute Length	Overall Length
	D ₁	L ₁	L ₂
D5405083	8.3	37	79
D5405084	8.4	37	79
D5405085	8.5	37	79
D5405086	8.6	40	84
D5405087	8.7	40	84
D5405088	8.8	40	84
D5405089	8.9	40	84
D5405090	9.0	40	84
D5405091	9.1	40	84
D5405092	9.2	40	84
D5405093	9.3	40	84
D5405094	9.4	40	84
D5405095	9.5	40	84
D5405096	9.6	43	89
D5405097	9.7	43	89
D5405098	9.8	43	89
D5405099	9.9	43	89
D5405100	10.0	43	89
D5405102	10.2	43	89
D5405105	10.5	43	89
D5405110	11.0	47	95
D5405115	11.5	47	95
D5405120	12.0	51	102
D5405130	13.0	51	102

► TiN(D6405), TiCN(DG405) and TiAlN(DH405) are available on your request.

◎ : Excellent ○ : Good

ISO	P										M				K			
	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel				Stainless steel			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
VDI 3323	1	13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎
ISO	N										S				H			
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and CopperAlloys (Bronze / Brass)				Non Metallic Materials			
Material Description	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HRc	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎



CARBIDE DRILLS

JOBBER

VOLLHARTMETALL-SPIRALBOHRER

KURZ

Forets carbure, série courte


COURTE

MPUNTE IN METALLO DURO


CORTA

► **Application** : Drilling steels in general, cast steels, cast iron, chilled cast iron, malleable cast iron, non-ferrous heavy metals, non-ferrous light metals, abrasive plastics.

► **Verwendung** : Zum wirtschaftlichen Bohren von Stahl allgemein, Stahlguß, Hart-und Temperguß, Nichteisen Leichtmetallen, abrasiven Kunststoffen.



under 3.0mm 3.0mm & over

DIN
338

CARBIDE

30°

h6

h7

118°

P.167

D₁=D₂

Unit : mm

EDP No.	Drill Diameter	Flute Length	Overall Length
	D ₁	L ₁	L ₂
D5407054	5.4	57	93
D5407055	5.5	57	93
D5407056	5.6	57	93
D5407057	5.7	57	93
D5407058	5.8	57	93
D5407059	5.9	57	93
D5407060	6.0	57	93
D5407061	6.1	63	101
D5407062	6.2	63	101
D5407063	6.3	63	101
D5407064	6.4	63	101
D5407065	6.5	63	101
D5407068	6.8	69	109

EDP No.	Drill Diameter	Flute Length	Overall Length
	D ₁	L ₁	L ₂
D5407070	7.0	69	109
D5407075	7.5	69	109
D5407080	8.0	75	117
D5407085	8.5	75	117
D5407090	9.0	81	125
D5407095	9.5	81	125
D5407100	10.0	87	133
D5407102	10.2	87	133
D5407105	10.5	87	133
D5407110	11.0	94	142
D5407115	11.5	94	142
D5407120	12.0	101	151
D5407130	13.0	101	151

► TiN(D6407), TiCN(DG407) and TiAlN(DH407) are available on your request.

GENERAL
CARBIDE
DRILLSMULTI-1
DRILLSHPD
DRILLSGOLD-P
DRILLSSUPER-GP
DRILLSSTRAIGHT
SHANK
DRILLSTAPER SHANK
DRILLSNC-
SPOTTING
DRILLSCENTER
DRILLSSPADE
DRILLS

REAMERS

COUNTER
SINKSCOUNTER
BORESTECHNICAL
DATA

◎ : Excellent ○ : Good

ISO	P										M				K			
	Non-alloy steel					Low alloy steel					High alloy steel and tool steel				Stainless steel			
Material Description	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
VDI 3323	13	25	28	32	10	29	32	38	15	35	200	200	240	180	10	26	3	25
HRc	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S						H		
	Aluminum-wrought alloy					Aluminum-cast, alloyed					Copper and Copper Alloys (Bronze / Brass)						Non Metallic Materials		
Material Description	21	22	23	24	25	26	27	28	29	30	Heat Resistant Super Alloys						Titanium Alloys		
VDI 3323	60	100	75	90	130	110	90	100			31	32	33	34	35	36	37	38	39
HRc	60	100	75	90	130	110	90	100			15	30	25	38	34	36	37	55	60
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630
Recommended	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

D5405, D5407

SERIES

GENERAL CARBIDE DRILLS

 RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm)		Vc (m/min)	Parameter	Drill Diameter (mm)							
					1.0	2.0			3.0	4.0	5.0	6.0	8.0	10.0	12.0	13.0
P	1	Non-alloy steel	55	RPM FEED	17510 0.02-0.03	8750 0.02-0.04	70	RPM FEED	7430 0.03-0.05	5570 0.03-0.06	4460 0.04-0.07	3710 0.05-0.08	2790 0.07-0.10	2230 0.08-0.12	1860 0.10-0.14	1710 0.12-0.16
	2		45	RPM FEED	14320 0.02-0.03	7160 0.02-0.04	60	RPM FEED	6370 0.03-0.05	4770 0.03-0.06	3820 0.04-0.07	3180 0.05-0.08	2390 0.07-0.10	1910 0.08-0.12	1590 0.10-0.14	1470 0.12-0.16
	3															
	4															
	5															
	6	Low alloy steel	35	RPM FEED	11140 0.02-0.03	5570 0.02-0.04	50	RPM FEED	5310 0.03-0.05	3980 0.03-0.06	3180 0.04-0.07	2650 0.05-0.08	1990 0.07-0.10	1590 0.08-0.12	1330 0.10-0.14	1220 0.12-0.16
	7															
	8															
	9															
	10	High alloyed steel, and tool steel														
	11															
M	12	Stainless steel	15	RPM FEED	4770 0.01-0.02	2390 0.01-0.03	25	RPM FEED	2650 0.02-0.04	1990 0.02-0.05	1590 0.03-0.06	1330 0.04-0.07	990 0.06-0.09	800 0.07-0.11	660 0.08-0.12	610 0.09-0.13
	13															
	14															
K	15	Grey cast iron	25	RPM FEED	7960 0.03-0.04	3980 0.03-0.05	45	RPM FEED	4770 0.04-0.06	3580 0.04-0.07	2860 0.05-0.08	2390 0.06-0.09	1790 0.09-0.12	1430 0.12-0.16	1190 0.14-0.18	1100 0.16-0.20
	16															
	17	Nodular cast iron														
	18															
	19	Malleable cast iron														
	20															
N	21	Aluminum-wrought alloy	100	RPM FEED	31830 0.04-0.05	15920 0.04-0.06	140	RPM FEED	14850 0.05-0.07	11140 0.05-0.08	8910 0.06-0.09	7430 0.08-0.11	5570 0.12-0.15	4460 0.15-0.19	3710 0.19-0.23	3430 0.21-0.25
	22		90	RPM FEED	28650 0.04-0.05	14320 0.04-0.06	120	RPM FEED	12730 0.05-0.07	9550 0.05-0.08	7640 0.06-0.09	6370 0.08-0.11	4770 0.12-0.15	3820 0.15-0.19	3180 0.19-0.23	2940 0.21-0.25
	23	Aluminum-cast, alloyed	70	RPM FEED	22280 0.04-0.05	11140 0.04-0.06	100	RPM FEED	10610 0.05-0.07	7960 0.05-0.08	6370 0.06-0.09	5310 0.08-0.11	3980 0.12-0.15	3180 0.15-0.19	2650 0.19-0.23	2450 0.21-0.25
	24		60	RPM FEED	19100 0.04-0.05	9550 0.04-0.06	80	RPM FEED	8490 0.05-0.07	6370 0.05-0.08	5090 0.06-0.09	4240 0.08-0.11	3180 0.12-0.15	2550 0.15-0.19	2120 0.19-0.23	1960 0.21-0.25
	25															
	26	Copper and Copper Alloys (Bronze / Brass)														
	27															
	28															
	29	Non Metallic Materials														
	30															
S	31	Heat Resistant Super Alloys														
	32															
	33															
	34															
	35															
	36	Titanium Alloys	10	RPM FEED	3180 0.01-0.02	1590 0.01-0.03	20	RPM FEED	2120 0.02-0.04	1590 0.02-0.05	1270 0.03-0.06	1060 0.04-0.07	800 0.06-0.09	640 0.07-0.11	530 0.08-0.12	490 0.09-0.13
	37															
H	38	Hardened steel														
	39	Chilled Cast Iron														
	41	Hardened Cast Iron														

CARBIDE

HSS

 i-ONE
DRILLS

 i-DREAM
DRILLS

 DREAM
DRILLS
-GENERAL

 DREAM
DRILLS
-HIGH FEED

 DREAM
DRILLS
-FLAT BOTTOM

 DREAM
DRILLS
-INOX

 DREAM
DRILLS
-ALU

 DREAM
DRILLS
-CFRP

 DREAM
DRILLS
-MQL

 DREAM DRILLS
for HIGH
HARDENED
STEELS

 GENERAL
CARBIDE
DRILLS

 MULTI-1
DRILLS

 HPD
DRILLS

 GOLD-P
DRILLS

 SUPER-GP
DRILLS

 STRAIGHT
SHANK
DRILLS

 TAPER SHANK
DRILLS

 NC-
SPOTTING
DRILLS

 CENTER
DRILLS

 SPADE
DRILLS

REAMERS

 COUNTER
SINKS

 COUNTER
BORES

 TECHNICAL
DATA